

# EVERHOT®

Hot Water Solution



Made by Rheem Manufacturing

- ✔ Great Value
- ✔ Great Quality
- ✔ Australian Brand

Everhot. Job Done!



# HEAVY DUTY ELECTRIC STORAGE MAIN PRESSURE



ELECTRIC

120L  
-  
320L

DELIVERY

3 x 3.6kW  
6 x 3.6kW  
3 x 4.8kW  
6 x 4.8kW

INPUT

3  
YEAR

CYLINDER  
WARRANTY

Indoor or  
Outdoor

INSTALLATION




Everhot Heavy Duty Electric is a robust commercial water heater range designed to provide between 310 and 820 litres of hot water in the first hour and 190 to 500L/hr recovery hour after hour at 50°C temperature rise.

## FEATURES


- Available with 3 or 6 elements with 3.6kW or 4.8kW ratings
- Suitable for indoor and outdoor installation
- Direct replacement for the most popular heavy duty electric models
- Heavy duty enamel and larger anode provide long service life
- Mains pressure
- Trade Adjustable thermostats for sanitising applications
- 3 year cylinder warranty & 1 year spare parts
- Manifold multiple units together for greater capacity and output

### MANIFOLD ARRANGEMENT

Hot header assembly

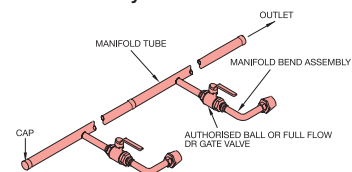

Cold header assembly

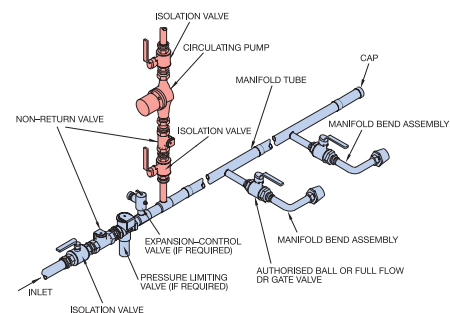


Made by Rheem Manufacturing


**EVERHOT**<sup>®</sup>  
Hot Water Solution

SPECIFICATIONS		120L	150L	320L	120L	150L	320L
Model Name		ERAH120308	ERAH150308	ERAH320308	ERAH120608	ERAH150608	ERAH320608
Hot Water Delivery	Litres	120	150	320	120	150	320
Heating Elements	kW	3 x 3.6kW	3 x 3.6kW	3 x 3.6kW	6 x 3.6kW	6 x 3.6kW	6 x 3.6kW
	or	3 x 4.8kW	3 x 4.8kW	3 x 4.8kW	6 x 4.8kW	6 x 4.8kW	6 x 4.8kW
Power Consumption	kW	10.8	10.8	10.8	21.6	21.6	21.6
	or	14.4	14.4	14.4	28.8	28.8	28.8
Power Supply		380VAC / 50HZ					
T & PR Setting Pressure	kPa	1000					
Max Water Supply Pressure	kPa	680					
Adjustable Water Tem/ Range	°C	60 ~ 80					
T & PR Connections		RP¾/20					
Cold & Hot Water Connections		RP¾/20	RP¾/20	RP1¼/20	RP¾/20	RP¾/20	RP1¼/20
Dimensions							
A	mm	1114	1364	1759	1114	1364	1759
B	mm	948	1198	1568	948	1198	1568
C	mm	68	68	88	68	68	88
D	mm	458	458	569	458	458	569
E	mm	497	497	608	497	497	608
G	degrees	22	22	29	22	22	29
Approx. Weight (Empty)	kg	43	50	80	45	52	82

TECHNICAL ELECTRIC PERFORMANCE DETAIL					
Heating Elements		3 x 3.6kW	3 x 4.8kW	6 x 3.6kW	6 x 4.8kW
Total Input	kW	10.8	14.4	21.6	28.8
Current (per phase)	Amps	15	20	30	40
Litres Recovery Per Hour at Rise of	20°C	460	620	930	1240
	30°C	310	410	620	830
	40°C	230	310	460	620
	50°C	190	250	370	500

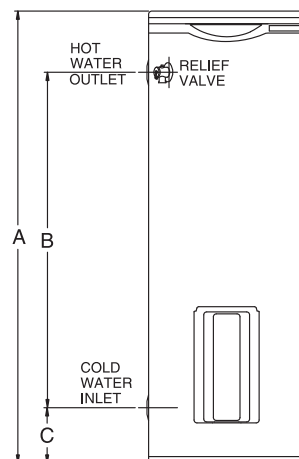

Note: Allow additional top clearance for anode replacement

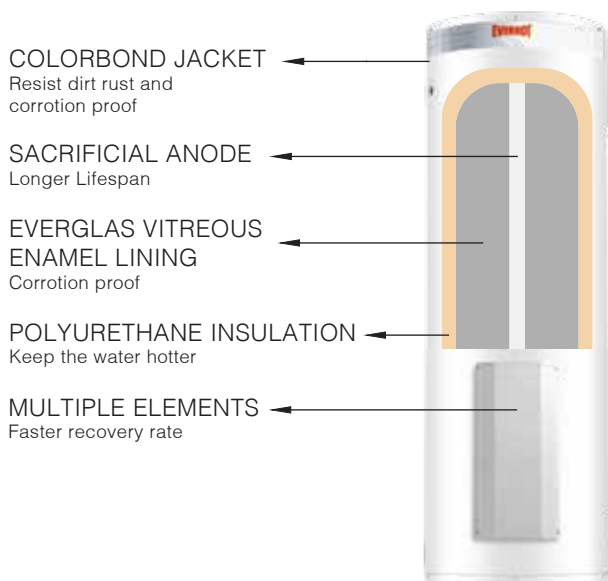

Warranty: 3 Years on Cylinder, 1 Year Parts & Labour warranty on all other components for Commercial installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions.